


# ST6 Series Surface Mount LED



## Design Features

- Low profile and high power warning module
- 19 built-in selectable flash patterns
- LEDs rated to 100,000 hours of operation
- Non-volatile memory recalls last flash pattern used at power up
- Multiple units are synchronizable and can flash simultaneously or alternately
- Reverse polarity protection
- Weatherproof and vibration resistant design for external or internal use.
- Aluminum base for heat dissipation.

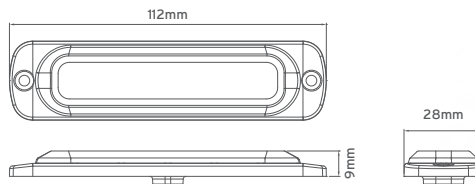

## Specifications

- Approvals: SAE Class 1, ECE R10
- 6 x High-power LEDs, 19 Flash Patterns
- Operating Voltage: 12-24VDC
- Avg. Current: 0.5A @12VDC / 0.25A @24VDC
- Avg. Power: 6 Watts (varies with flash pattern)
- Max. Current: 1A @12VDC / 0.5A @24VDC
- Max. Power: 10 Watts (varies with flash pattern)
- Multi-Unit Synchronization: Over 15 units
- H 9mm x D 28mm x W 112mm

## Part Numbers

ST6BS-BB	ST6BS-RR	ST6BS-RB
ST6VBS-BB	ST6VBS-RR	ST6VBS-RB



Britax Automotive Equipment Pty Ltd • Freecall 1800 644 118 • [www.pseaustralia.com](http://www.pseaustralia.com)

