

AVAILABLE FROM




Unit 1 / 23 Christable Way  
LANDSDALE WA 6065  
+ 61 8 6201 3170  
interfireagencies.com.au  
info@interfireagencies.com.au

## Stabilo-Star-G Super

Approval: EN 1947 Kat. II, Typ B - KI.3

„the semirigid high pressure hose“

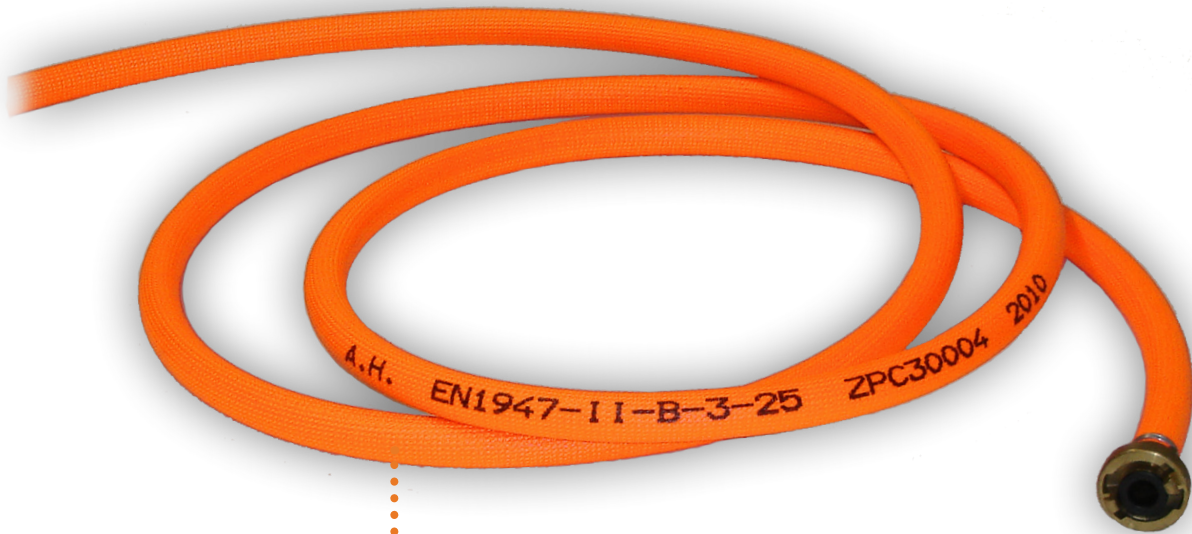

PU/PVC outside coating for best visibility



<b>Designation:</b>	Stabilo-Star-G Super (G for rubberized)
<b>Construction:</b>	semirigid hose, Polyester (high tenacity), circular woven, twill weave, weft yarn made of PES-monofile
<b>Inside lining:</b>	EPDM-rubber (Ethylen-Propylen-Dien caoutchouc makes the hose resistant against moisture high thermal stress and against chemical influences)
<b>Color/Marking:</b>	signal orange
<b>Outer lining:</b>	PU/PVC outside coating smooth
<b>Characteristics:</b>	semirigid hose with small diameter of rolls, very high abrasion resistance, light-weight and flexible, resistant against rotting and aging, good visibility through signal color, easy to clean
<b>Applications:</b>	high-pressure-hose for pumps and fire-vehicles

# Technical Data *Stabilo-Star-G Super*

## D25 deliverytime on request, minimum order possible

bending radius = 100 mm

inner diameter		max. working pressure		bursting pressure		weight		thickness
inch	mm	p.s.i.	bar	p.s.i.	bar	kg/m	lb/feet	
1	25	580	40	> 1450	> 100	0,24	0,16	3,0 mm

length	Art. Nr.	
	with couplings	no couplings
15 m	-	<b>300 095</b>
20 m	-	<b>362 330</b>
30 m	-	<b>365 308</b>
60 m	-	<b>377 436</b>

## 32 deliverytime on request, minimum order possible

ending radius = 140 mm

inner diameter		max. working pressure		bursting pressure		weight		thickness
inch	mm	p.s.i.	bar	p.s.i.	bar	kg/m	lb/feet	
1 1/4	32	580	40	> 1450	> 100	0,28	0,19	3,0 mm

length	Art. Nr.	
	with couplings	no couplings
20 m	-	<b>377 482</b>
30 m	-	<b>377 483</b>
40 m	-	<b>377 484</b>
60 m	-	<b>377 486</b>

## 38 deliverytime on request, minimum order possible

bending radius = 175 mm

inner diameter		max. working pressure		bursting pressure		weight		thickness
inch	mm	p.s.i.	bar	p.s.i.	bar	kg/m	lb/feet	
1 1/2	38	580	40	> 1450	> 100	0,36	0,24	3,0 mm

length	Art. Nr.	
	with couplings	no couplings
20 m	-	<b>362 704</b>
30 m	-	<b>362 705</b>
40 m	-	<b>300 060</b>
60 m	-	<b>362 638</b>



AVAILABLE FROM



Unit 1 / 23 Christable Way  
 LANDSDALE WA 6065  
 + 61 8 6201 3170  
[interfireagencies.com.au](http://interfireagencies.com.au)  
[info@interfireagencies.com.au](mailto:info@interfireagencies.com.au)