

**TECHNISCHE DATEN (TECHNICAL DATA):**

**NENNDRUCK (NOMINALE PRESSURE)**

$P_N$  .....  $63^{+2}$  MPa ( $630^{+20}$  bar) /  $70^{+2}$  MPa ( $700^{+20}$  bar)

**ABSCHALTDRUCK GR. PUMPKOLBEN**

(MAX. WORKING PRESSURE FIRST STAGE) ..  $5^{+2}$  MPa ( $50^{+20}$  bar)

**FÖRDERMENGE PRO PUMPSPIEL (OUTPUT PER STROKE)**

BIS (TO) 5 MPa (50 bar) ..... 40 cm<sup>3</sup>

ÜBER (OVER) 5 MPa (50 bar) ..... 3,1 cm<sup>3</sup>

FÜLLVOLUMEN (OIL VOLUME) ..... ca. 2,5 l

NUTZVOLUMEN (OIL CAPACITY) HORIZONTAL ... ca. 1,8 l

TEMPERATURBEREICH (WORKING TEMPERATURE) -30°C bis 80°C

**MAX. HANDKRAFT**

(MAX. OPERATING FORCE AT PUMP LEVER . ca. 315 N / 340 N


GEWICHT INKL. ÖL (WEIGHT INCL. OIL) ..... 9,2 kg

EINSETZBAR UNTER EINEM NEIGUNGSWINKEL VON 20°


ZUR WAAGRECHTEN, IN JEDER RICHTUNG

(CAN BE USED EVEN WHEN IN NON HORIZONTAL

POSITIONS UP TO A MAXIMUM INCLINATION OF 20°)

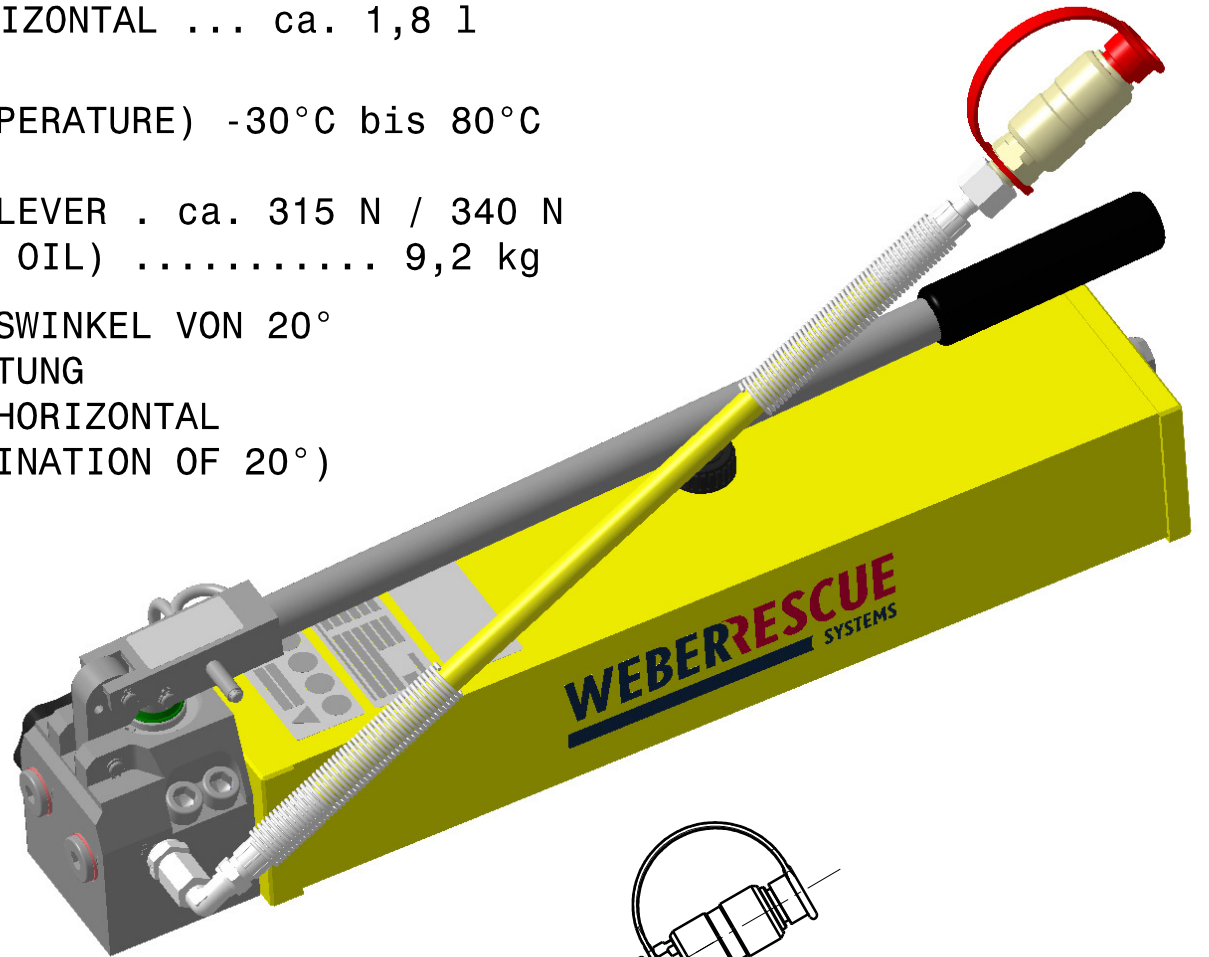

SCHLÄUCH MIT KNICKSCHUTZ  
LÄNGE 2m; FARBE GELB  
HOSE WITH PROTECTIVE  
AGAINST BUCKLING; LENGHT 2m; YELLOW

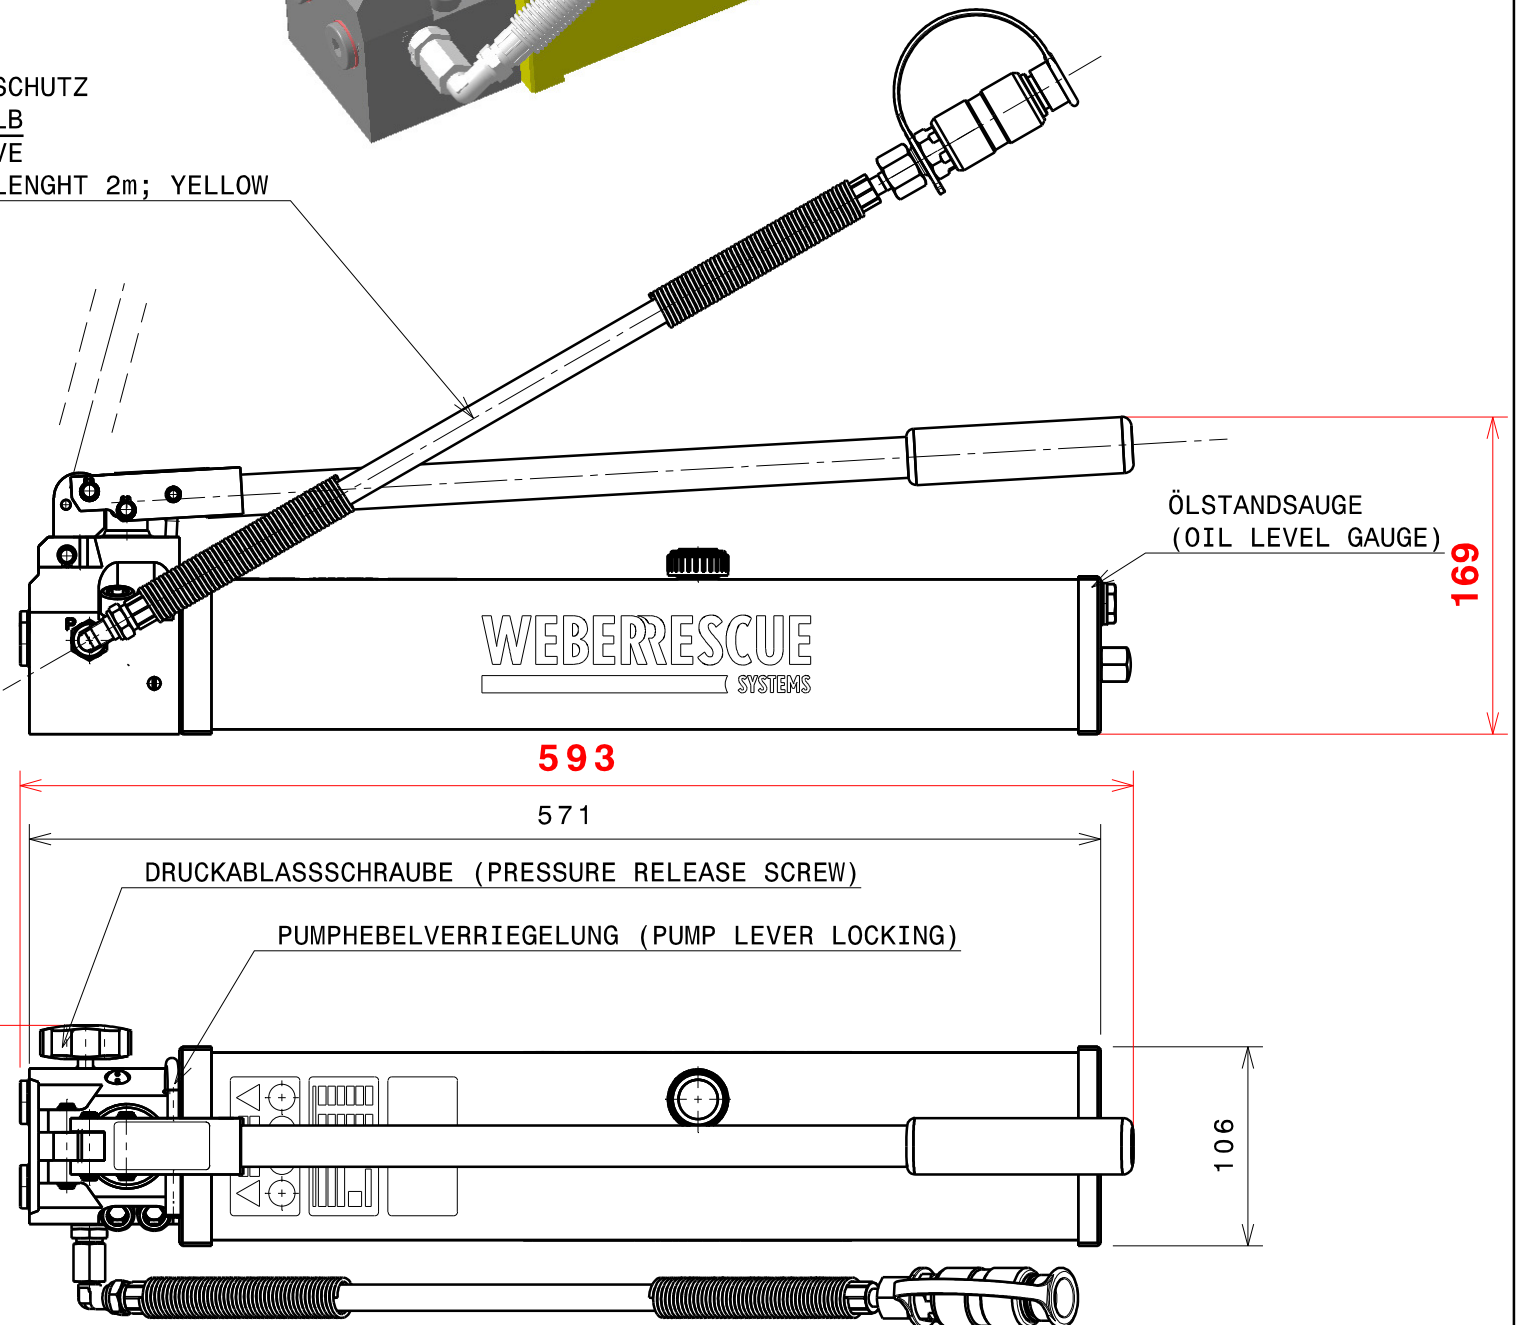

GEPR. JSC  
CHECK.

GEZ. KST  
DRAW. DAT. 05.05.10  
DAT.

KST  
03.10.11  
GAEAND. MODIF. AEND.-DATUM MOD.-DATE

110687  
A

AEND.-NR.  
MOD.-NO.  
REVISION  
REVISION

FREIMASSTOLERANZEN (GENERAL TOLERANCES)	LAENGENMASS (LENGHT)mm	...50	50...250	250...1000	1000...	WINKELMASS (ANGLE)	...180°
	TOLERANZ (TOLERANCE)mm	±1,5	± 2,0	± 3,0	± 5,0	TOLERANZ (TOLERANCE)	±10°