

RANGER 800

Percolating Hose



The Proven Percolating Hose

The **RANGER 800** Fire Hose has a unique lining of compounded rubber latex to significantly increase the life of Ranger Hose and still maintain the self-protecting features of percolation. Available in diameters from 25mm, 38mm & 65mm with lengths up to 30 metres.

The **RANGER 800** complies with AS2792 Class "H", designed to withstand exceptionally high pressure while maintaining the self-protecting features of percolation.

The **RANGER 800** has a burst pressure of 5250kPa and a working pressure of 2100kPa having an all synthetic jacket, the Ranger 800 is unaffected by mildew and will retain its strength and durability under all climatic conditions.



25mm Fire Hose



25mm Fire Hose



25mm Fire Hose



38mm Fire Hose



38mm Fire Hose



38mm Fire Hose



65mm Fire Hose




65mm Fire Hose



65mm Fire Hose

Construction

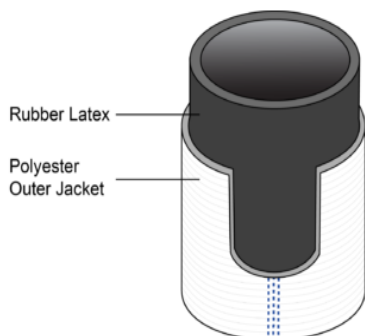

Rubber Latex
Polyester
Outer Jacket

Features

- Easy Rolling
- Age Resistant
- Weather Durability
- Mildew Resistant
- Self Protecting Percolation

Dimensions

Available in: 25mm, 38 mm & 65mm

Burst Range

Burst Pressure: 5250kPa
Working Pressure: 2100kPa

Optional Colours

Yellow, Red, Blue
** Other colours available on application*

AVAILABLE FROM



National Sales Office & Warehouse
Unit 1 / 23 Christable Way
LANDSDALE Western Australia 6055
1300 922 303
+ 61 8 6201 3170
interfire.com.au
info@interfire.com.au

South Australian Office & Warehouse
Unit 9 / 28 Heath St
LONSDALE South Australia, 51605
1300 922 303
+ 61 8 6201 3170
interfire.com.au
info@interfire.com.au