ARMTEX

AVAILABLE FROM

InterFire AGENCIES

National Sales Office & Warehouse
Unit 1 / 23 Christable Way
LANDSDALE Western Australia 6055

South Australian Office & Warehouse
Unit 2 / 347 Main South road
MORPHETT VALE South Australia 5162

New South Wales Office
PO BOX 407
CESSNOCK New South Wales 2325

1300 922 303 Int + 61 8 6201 3170 info@interfire.com.au www.interfire.com.au

ARMTEX



30 years of research, development and experience combined with the most up to date equipment and production technics make ARMTEX a good choice.


First class craftsmanship, a rigorous quality control of raw materials and finished products make ARMTEX an even better choice.

30.000.000 feet in use by professional fire fighters through out the world acknowledges the superior quality of ARMTEX and make it your best choice in fire hose.

EXTRUDED HOSE

ARMTEX is woven in modern circular looms producing a seamless 100% synthetic reinforcement forming a single body with the cover and inner lining of the hose.

The synthetic rubber compound used in the result of long experience and research becomes intimately interlocked to the reinforcement, without the need of glues or adhesives of any use.

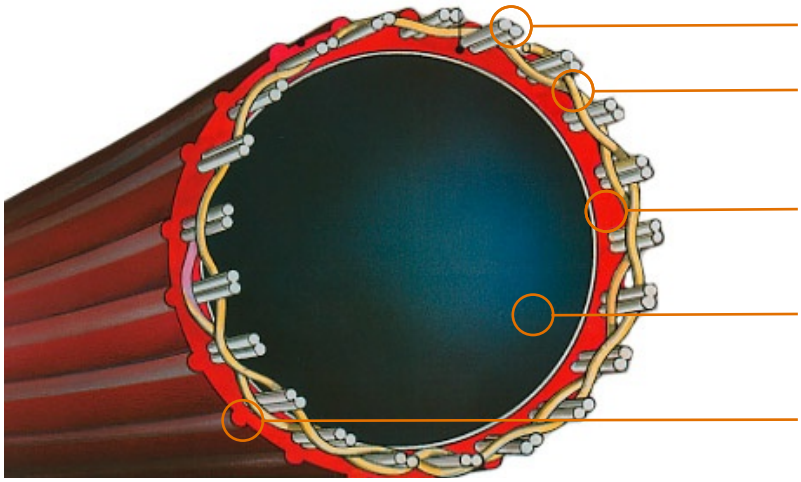

- Warp made in high tenacity fibers
- Weft made of multi-ply high tenacity fibers
- Synthetic rubber compound specially formulated for abrasion, flexibility, chemical resistance and protection against ageing
- Smooth inner linig surface with very low friction loss
- Ribbed for hose protection and ease of handling

ARMTEX

AVAILABLE FROM

InterFire AGENCIES

National Sales Office & Warehouse
Unit 1 / 23 Christable Way
LANDSDALE Western Australia 6055

South Australian Office & Warehouse
Unit 2 / 347 Main South road
MORPHETT VALE South Australia 5162

New South Wales Office
PO BOX 407
CESSNOCK New South Wales 2325

1300 922 303 Int + 61 8 6201 3170 info@interfire.com.au www.interfire.com.au

tipsa

TOUGH

The especial compound of the rubber cover and its profile protect the hose from damage by abrasion, hot metal contact, puncture or impact.

CHEMICAL RESISTANCE

ARMTEX is manufactured to resist a wide range of chemical products: oil, hydrocarbons, acids, alkalis, salt water, etc.

WEATHER RESISTANCE

Outstanding performance at extreme temperatures -37°C (-35°F) + 50°C (122°F). Protected against ozone, ultraviolet and atmospheric weather.

SAFE WATER FLOW

ARMTEX HD is superior to a double jacket constructions in kink and flow performance even at low pressures.

EASILY CLEANED

A quick wipe down is sufficient to remove dirt and grit. If necessary it can be jet washed and detergent to remove chemicals etc.

NO DRYING

No need to dry the hose. ARMTEX is mildew, rotproof and waterproof. Just clean and coil and the hose is ready for service again.

EASY REPAIR

ARMTEX is easily repaired when damaged by cuts or puncture. Our REPOKIT is quick and simple to use.

TECHNICAL DATA

Nominal Diámeter		Burst Pressure		Test Pressure		Coorising Pressure		Weight		Coil Diameters	
inch	mm	psi	kPa	psi	kPa	psi	kPa	Lbs/ft	kg	Inch	cm
1 1/2	38	900	6200	600	4100	300	2100	0,22	10		
1 3/4	45	900	6200	600	4100	300	2100	0,26	11,5		
2	52	750	5100	500	3500	250	1750	0,30	13,5		
2 1/2	65	750	5100	500	3500	250	1750	0,40	18		
3	75	700	4800	400	2800	200	1400	0,47	21		
4	100	700	4800	400	2800	200	1400	0,80	36		

WARRANTY

ARMTEX proven design products are carefully made by first class craftsmen and supported by a qualified technical team. ARMTEX is made with premium raw materials which are carefully selected and tested. The final product undergoes extensive control before being branded ARMTEX.

Under normal fire fighting conditions ARMTEX will offer full satisfaction and is covered by our 10 YEAR WARRANTY.