




Recoila

HOSE AND CORD REELS

T SERIES HEAVEY DUTY STEEL REELS

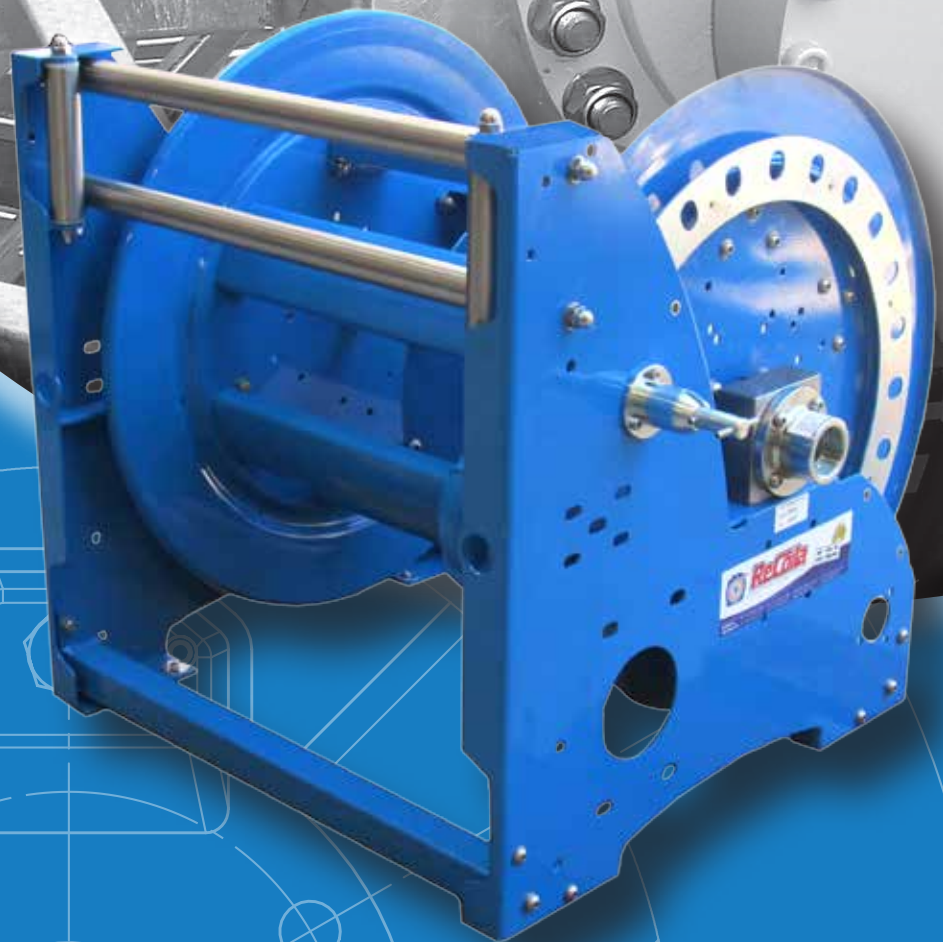

300



HOSE REELS.

Our total, dedicated business.

We've been making hose reels for decades - over 38 years in fact - and this manufacturing wisdom, coupled with competitive pricing, knowledgeable staff, a wealth of technical information and solid after-sales service positions us firmly at the forefront of our industry.

Our head office and factory is based in Sydney Australia, with a well-stocked distribution centre in Auckland NZ, as well as reputable distribution partners across the globe.

ReCoila has a fully equipped production facility and a team of experts to ensure our reels are designed and manufactured to exacting standards.

With a comprehensive range of hose, cord and cable reels and a dedicated custom design and manufacturing team, ReCoila can supply the right reel for your individual application - with safety and productivity in mind.

AUSTRALIAN MANUFACTURING. INTERNATIONAL DISTRIBUTION.

ReCoila is a proudly Australian company based in Western Sydney, with distribution reach across Australia, New Zealand and internationally.


We have resellers strategically based in key metro and regional areas to ensure delivery to customers is as swift as possible, and long standing relationships with our freight carriers mean that logistics are coordinated efficiently.

AUSTRALIAN MADE + QUALITY IMPORTS = COMPREHENSIVE RANGE.

Our range constitutes a wealth of engineered polypropylene and heavy duty steel and stainless steel reels, supplemented with hand-picked reels from some of the world's best manufacturers, to present a truly comprehensive product portfolio. And, our ability to design and manufacture customised reels in-house means that we're sure to have a reel to suit your needs.

VISIT
RECOILA
ONLINE



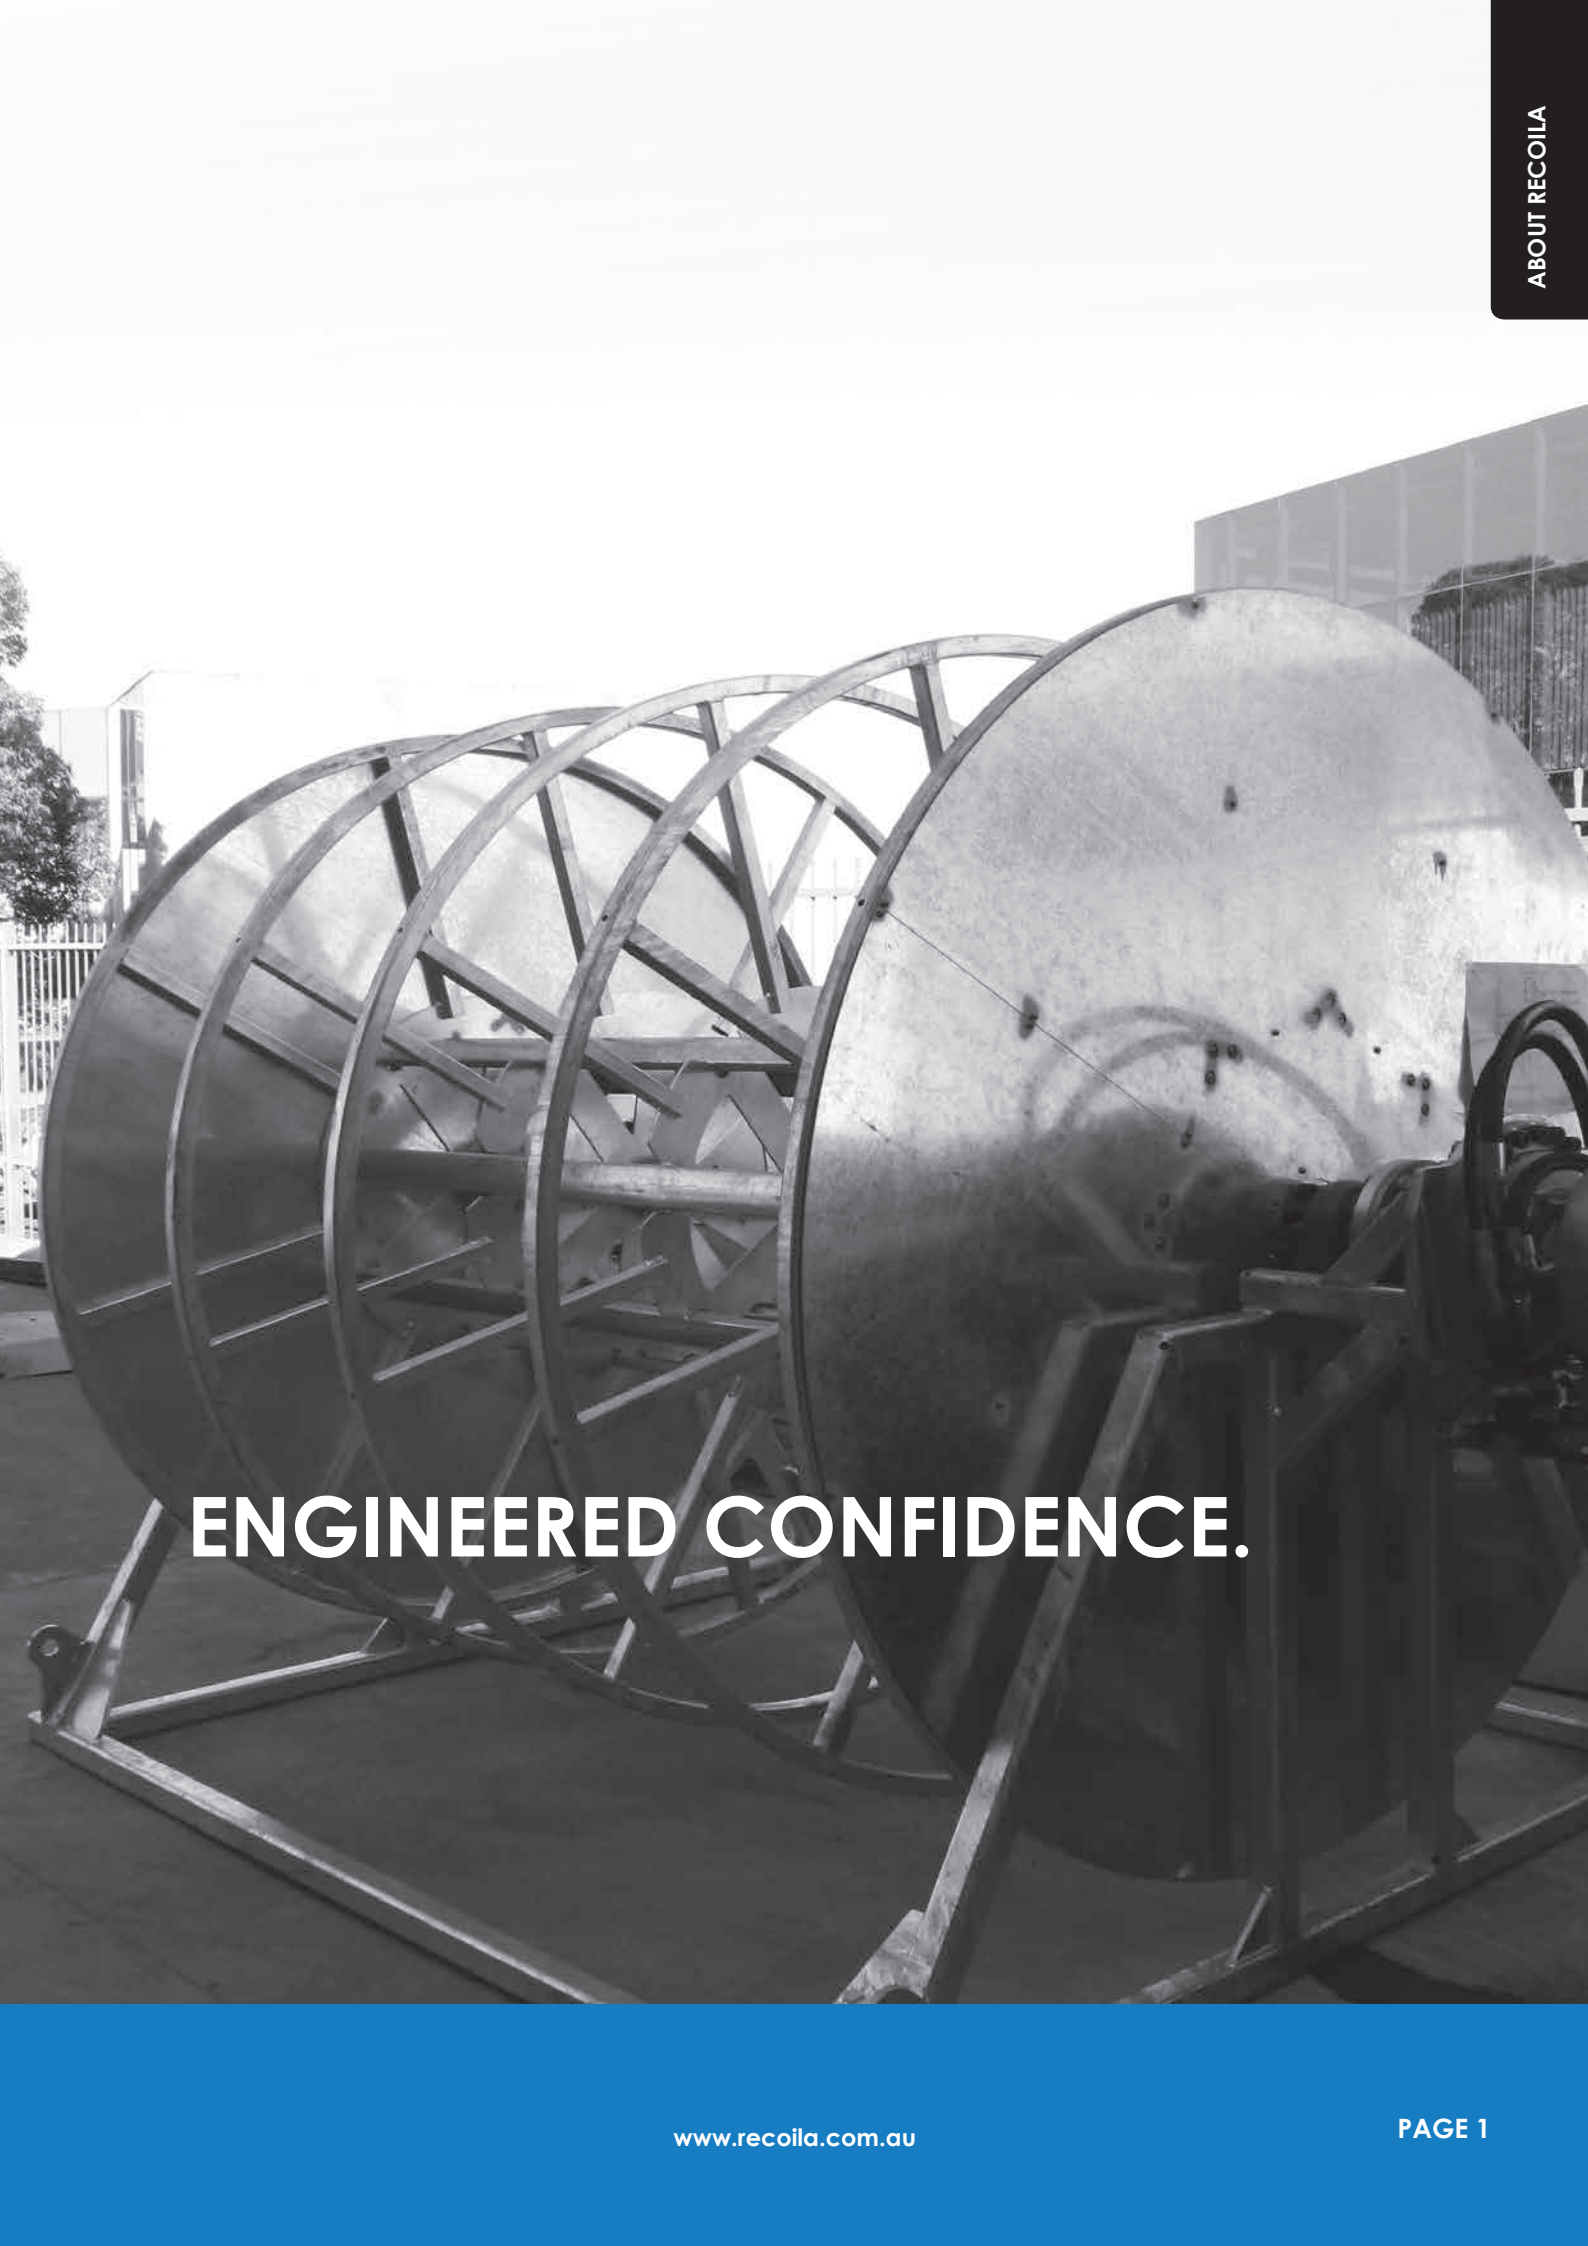

ENGINEERED CONFIDENCE.

WHY USE HOSE REELS?

Hose management and minimising risk



HAZARD:

DO HOSES REGULARLY LAY ACROSS PATHS AND WORK AREAS?



HAZARD:

ARE HOSES HEAVY OR AWKWARD TO MOVE?



HAZARD:

DO POORLY MANAGED OR POORLY MAINTAINED HOSES CREATE WET, SLIPPERY WORK AREAS?



HAZARD:

ARE HOSES BEING DAMAGED DUE TO POOR STORAGE, FOR EXAMPLE BEING RUN OVER BY FORKLIFTS OR VEHICLES?



HOW HOSES BECOME HAZARDS

You're no doubt aware that trips, falls and ergonomic injuries are common in even the most strictly regulated work environments.

Workplaces use hoses and cables for all manner of applications, each one carrying potential safety risks such as:

- Trips and falls due to stray hoses and cables
- Ergonomic injury if heavy, awkward hoses need to be moved
- Leakage (& consequently wet areas) causing slip hazards.

HOSE LIFE CAN BE AFFECTED TOO

Hoses themselves when left on the floor can be weakened by environmental contaminants, cleaning chemicals, being run over by work vehicles, or being bent or coiled tighter than the hoses natural bend radius, and will ultimately fail as the structure of the hose is weakened.

THE SOLUTION – AND THE FLOW ON BENEFITS

ReCoila can offer a high quality hose and cable management solution that can reduce the risk of trips and falls from hoses and improve your safety record.

Aside from making your workplace safer, the use of ReCoila hose reels will increase productivity through providing operators a more effective means of handling hoses, cords and cables in the workplace.

Higher productivity, reduced downtime and lower maintenance costs are an additional benefit of efficient hose management.



T SERIES

Rugged, heavy duty, customisable



ReCoila's T Series heavy duty hose reels are designed for applications where reliability, longevity and strength is a must.

The T Series is fabricated from heavy gauge 3mm steel plate to ensure rigidity and strength. High flow swivels and fluid paths ensure optimum flow, and a heavy duty spool and stainless steel main axle resists corrosion and damage.

The T Series has been developed with a modular frame and spool configuration that works with a wide range of add-ons, resulting in a reel that is customised to your particular application.

IMAGE: CFA STRATEGIC COMMUNICATIONS

READY FOR ANYTHING

ReCoila's T Series hose reels can be customised for many applications such as transfer of fuels and lubricants, many types of fluid handling, high volume compressed air, food transfer, fire fighting and more.

For many years ReCoila T Series reels have been widely used in mining, marine, offshore and other heavy industries, earning them a reputation as a seriously tough hose reel.

ENGINEERED TO LAST

The main axle is machined from stainless steel to maintain strength and rigidity while preventing corrosion. The T Series has a heavy duty welded spool allowing the hose to be wound on 'charged' or 'uncharged', ensuring there is no crushing effect if charging of empty hoses needs to be carried out on the reel.

RELIABLE DRIVE SYSTEMS

The T Series uses a direct drive method of gear to gear, reducing maintenance costs associated with chain drive system alternatives.

Rewind speeds have been designed to maintain acceptable and controlled rewinding of the hose while also maintaining sufficient torque to rewind a fully charged hose.


Available in right hand or left hand configurations, the T Series hose reels have an optional auxiliary bevel crank drive with disengaging drives.

The ability to engage and disengage the bevel crank drive reduces wear on the drive system, reduces noise and also reduces the residual torque required to drive a traditionally engaged rewind system.

**HUGE RANGE OF
ADD-ONS**



**CUSTOMISED FOR
YOUR JOB**



**TRUSTED BY FIRE
BRIGADES**



**SUITABLE FOR
ANY HOSE**



**AUSTRALIAN
MADE QUALITY**



T SERIES HAND CRANK REELS

APPLICATION

The hand crank T Series reel is a simple, durable manually operated reel for applications where a motor driven reel is not necessary.

With its compact, rugged design, the hand crank T Series can hold up to 125m of hose depending on hose ID, and the optional extras for each model allow you to customise your reel to your individual requirements.



CT38640500
RIGHT HAND VERSION


HOSE TYPE	Supplied with or without hose
MEDIA	As per your hose type
CONSTRUCTION MATERIALS	Carbon Steel (standard) 304 Stainless Steel 316 Stainless Steel Aluminium
FINISH	Powder Coated Hot Dip Galvanized

Standard construction material is carbon steel.

FEATURES



DIMENSIONS

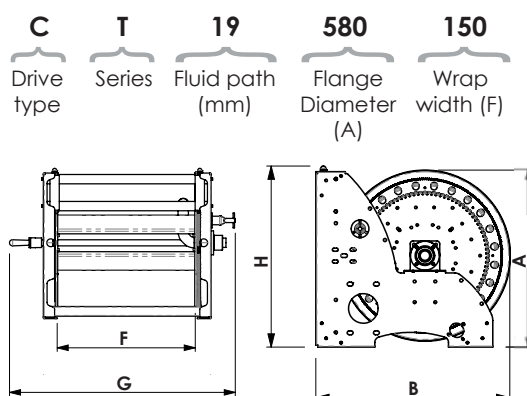

Detailed dimensional drawings available on request.
Quote drawing number ST10365-B.0

19mm ID HOSE CAPACITY

T SERIES HAND CRANK

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth (B)
STANDARD FEATURES	Pin lock	CT19580150	20	550	675	660
	Top rollers	CT19580200	30	600	675	660
	800psi swivel	CT19580300	45	700	675	660
	Powder coat	CT19580400	50	800	675	660
		CT19580450	60	850	675	660
OPTIONAL EXTRAS	Bottom rollers	CT19580500	70	900	675	660
	Friction brake	CT19580550	80	950	675	660
	5000psi swivel	CT19580600	90	1000	675	660
	10000psi swivel	CT19580650	95	1050	675	660
	Choice of finish	CT19640500	100	900	690	700
		CT19640550	110	950	690	700
		CT19640600	125	1000	690	700

* Wrap diameter for the above models = 280mm OD

25mm ID HOSE CAPACITY

T SERIES HAND CRANK

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth (B)
STANDARD FEATURES	Pin lock	CT25580200	18	600	675	660
	Top rollers	CT25580300	25	700	675	660
	800psi swivel	CT25580400	30	800	675	660
	Powder coat	CT25580450	35	850	675	660
OPTIONAL EXTRAS	Bottom rollers	CT25580500	40	900	675	660
	Friction brake	CT25580550	45	950	675	660
	1500psi swivel	CT25580600	55	1000	675	660
	4000psi swivel	CT25580650	60	1050	675	660
	Choice of finish	CT25640500	65	900	690	700
		CT25640550	70	950	690	700
		CT25640600	80	1000	690	700

* Wrap diameter for the above models = 280mm OD

32-38mm ID HOSE CAPACITY

T SERIES HAND CRANK

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth (B)
STANDARD FEATURES	Pin lock	CT38640300	15	700	690	700
	Top rollers	CT38640400	20	800	690	700
	800psi swivel	CT38640500	30	900	690	700
	Powder coat	CT38640600	35	1000	690	700
OPTIONAL EXTRAS	Bottom rollers	CT38640700	40	1100	690	700
	Friction brake	CT38780300	25	700	830	800
	1500psi swivel	CT38780400	35	800	830	800
	4000psi swivel	CT38780500	45	900	830	800
	Choice of finish	CT38780600	60	1000	830	800

* Wrap diameter for the above models = 410mm OD

50mm ID HOSE CAPACITY

T SERIES HAND CRANK

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth (B)
STANDARD FEATURES	Pin lock	CT50640300	5	700	690	700
	Top rollers	CT50640400	8	800	690	700
	800psi swivel	CT50640500	10	900	690	700
	Powder coat	CT50640600	12	1000	690	700
OPTIONAL EXTRAS	Bottom rollers	CT50640700	15	1100	690	700
	Friction brake	CT50780300	10	700	830	800
	1500psi swivel	CT50780400	20	800	830	800
	3000psi swivel	CT50780500	25	900	830	800
	Choice of finish	CT50780600	30	1000	830	800

* Wrap diameter for the above models = 410mm OD

T
SERIEST SERIES 12VDC EXP
ELECTRIC MOTOR DRIVEN REELS

APPLICATION

The 12VDC EXP motor driven T Series reel is suitable for a wide range of applications where a 12VDC motor driven reeling system is required.

HOSE TYPE

Supplied with or without hose

MEDIA

As per your hose type

CONSTRUCTION
MATERIALS

Carbon Steel
(standard)
304 Stainless Steel
316 Stainless Steel
Aluminium

FINISH

Powder Coated
Hot Dip Galvanized

Standard construction material is carbon steel.


FEATURES



ET38640500
RIGHT HAND VERSION
SHOWN WITH GEAR GUARD

DIMENSIONS

E	T	19	580	150
Drive type	Series	Fluid path (mm)	Flange Diameter (A)	Wrap width (F)

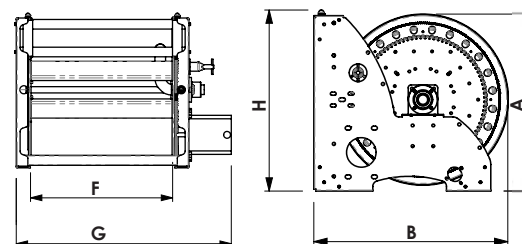

Detailed dimensional drawings available on request.
Quote drawing number ST10362-B.0

19mm ID HOSE CAPACITY

T SERIES 12VDC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	ET19580150	20	453	675	660
	Top rollers	ET19580200	30	503	675	660
	800psi swivel	ET19580300	45	603	675	660
OPTIONAL EXTRAS	Bottom rollers	ET19580400	50	703	675	660
	Friction brake	ET19580450	60	753	675	660
	5000psi swivel	ET19580500	70	803	675	660
	10000psi swivel	ET19580550	80	853	675	660
	Gear guard	ET19580600	90	903	675	660
	Reduction drive	ET19580650	95	953	675	660
	Electric clutch	ET19640500	100	803	690	700
	Auxiliary bevel crank	ET19640550	110	853	690	700
	Level layer rewind*	ET19640600	125	903	690	700
	Choice of finish					

* Wrap diameter for the above models = 280mm OD

*Level layer rewind system not available on all models. Please consult the factory.

25mm ID HOSE CAPACITY		T SERIES 12VDC EXP MOTOR DRIVEN				
		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	ET25580150	10	453	675	660
	Top rollers	ET25580200	18	503	675	660
	800psi swivel	ET25580300	25	603	675	660
OPTIONAL EXTRAS	Bottom rollers	ET25580400	30	703	675	660
	Friction brake	ET25580450	35	753	675	660
	1500psi swivel	ET25580500	40	803	675	660
	4000psi swivel	ET25580550	45	853	675	660
	Gear guard	ET25580600	55	903	675	660
	Reduction drive	ET25580650	60	953	675	660
	Electric clutch	ET25640500	65	803	690	700
	Auxiliary bevel crank	ET25640550	70	853	690	700
	Level layer rewind*	ET25640600	80	903	690	700
	Choice of finish					

* Wrap diameter for the above models = 280mm OD

32-38mm ID HOSE CAPACITY		T SERIES 12VDC EXP MOTOR DRIVEN				
		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	ET38640300	15	603	690	700
	Top rollers	ET38640400	20	703	690	700
	800psi swivel	ET38640500	30	803	690	700
OPTIONAL EXTRAS	Bottom rollers	ET38640600	35	903	690	700
	Friction brake	ET38640700	40	1003	690	700
	1500psi swivel	ET38780300	25	603	830	800
	4000psi swivel	ET38780400	35	703	830	800
	Gear guard	ET38780500	45	803	830	800
	Reduction drive	ET38780600	60	903	830	800
	Electric clutch					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

50mm ID HOSE CAPACITY		T SERIES 12VDC EXP MOTOR DRIVEN				
		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	ET50640300	5	603	690	700
	Top rollers	ET50640400	8	703	690	700
	800psi swivel	ET50640500	10	803	690	700
OPTIONAL EXTRAS	Bottom rollers	ET50640600	12	903	690	700
	Friction brake	ET50640700	15	1003	690	700
	1500psi swivel	ET50780300	10	603	830	800
	3000psi swivel	ET50780400	20	703	830	800
	Gear guard	ET50780500	25	803	830	800
	Reduction drive	ET50780600	30	903	830	800
	Electric clutch					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

*Level layer rewind system not available on all models. Please consult the factory.

T
SERIEST SERIES 24VDC EXP
ELECTRIC MOTOR DRIVEN REELS

APPLICATION

The 24VDC EXP motor driven T Series reel is suitable for a wide range of applications where a 24VDC motor driven reeling system is required.

HOSE TYPE

Supplied with or without hose

MEDIA

As per your hose type

CONSTRUCTION
MATERIALS

Carbon Steel
(standard)
304 Stainless Steel
316 Stainless Steel
Aluminium

FINISH

Powder Coated
Hot Dip Galvanized


Standard construction material is carbon steel.

FEATURES



EA38640500
RIGHT HAND VERSION
SHOWN WITH GEAR GUARD

DIMENSIONS

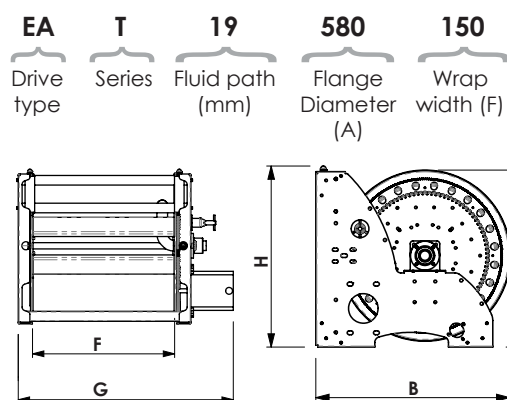

Detailed dimensional drawings available on request.
Quote drawing number ST10362-B.0

19mm ID HOSE CAPACITY

T SERIES 24VDC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	EAT19580150	20	453	675	660
	Top rollers	EAT19580200	30	503	675	660
	800psi swivel	EAT19580300	45	603	675	660
OPTIONAL EXTRAS	Bottom rollers	EAT19580400	50	703	675	660
	Friction brake	EAT19580450	60	753	675	660
	5000psi swivel	EAT19580500	70	803	675	660
	10000psi swivel	EAT19580550	80	853	675	660
	Gear guard	EAT19580600	90	903	675	660
	Reduction drive	EAT19580650	95	953	675	660
	Electric clutch	EAT19640500	100	803	690	700
	Auxiliary bevel crank	EAT19640550	110	853	690	700
	Level layer rewind*	EAT19640600	125	903	690	700
	Choice of finish					

* Wrap diameter for the above models = 280mm OD

*Level layer rewind system not available on all models. Please consult the factory.

25mm ID HOSE CAPACITY

T SERIES 24VDC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	EAT25580150	10	453	675	660
	Top rollers	EAT25580200	18	503	675	660
	800psi swivel	EAT25580300	25	603	675	660
OPTIONAL EXTRAS	Bottom rollers	EAT25580400	30	703	675	660
	Friction brake	EAT25580450	35	753	675	660
	1500psi swivel	EAT25580500	40	803	675	660
	4000psi swivel	EAT25580550	45	853	675	660
	Gear guard	EAT25580600	55	903	675	660
	Reduction drive	EAT25580650	60	953	675	660
	Electric clutch	EAT25640500	65	803	690	700
	Auxiliary bevel crank	EAT25640550	70	853	690	700
	Level layer rewind*	EAT25640600	80	903	690	700
	Choice of finish					

* Wrap diameter for the above models = 280mm OD

32-38mm ID HOSE CAPACITY

T SERIES 24VDC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	EAT38640300	15	603	690	700
	Top rollers	EAT38640400	20	703	690	700
	800psi swivel	EAT38640500	30	803	690	700
OPTIONAL EXTRAS	Bottom rollers	EAT38640600	35	903	690	700
	Friction brake	EAT38640700	40	1003	690	700
	1500psi swivel	EAT38780300	25	603	830	800
	4000psi swivel	EAT38780400	35	703	830	800
	Gear guard	EAT38780500	45	803	830	800
	Reduction drive	EAT38780600	60	903	830	800
	Electric clutch					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

50mm ID HOSE CAPACITY

T SERIES 24VDC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	EAT50640300	5	603	690	700
	Top rollers	EAT50640400	8	703	690	700
	800psi swivel	EAT50640500	10	803	690	700
OPTIONAL EXTRAS	Bottom rollers	EAT50640600	12	903	690	700
	Friction brake	EAT50640700	15	1003	690	700
	1500psi swivel	EAT50780300	10	603	830	800
	3000psi swivel	EAT50780400	20	703	830	800
	Gear guard	EAT50780500	25	803	830	800
	Reduction drive	EAT50780600	30	903	830	800
	Electric clutch					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

*Level layer rewind system not available on all models. Please consult the factory.

T SERIES 240VAC EXP ELECTRIC MOTOR DRIVEN REELS

APPLICATION

The 240VAC EXP motor driven T Series reel is suitable for a wide range of applications where a 240VAC motor driven reeling system is required. Various 240VAC motors are available; please ensure you contact the factory for dimensions applicable to your specific drive type.

HOSE TYPE

Supplied with or without hose

MEDIA

As per your hose type

CONSTRUCTION MATERIALS

Carbon Steel (standard)
304 Stainless Steel
316 Stainless Steel
Aluminium

FINISH

Powder Coated
Hot Dip Galvanized


Standard construction material is carbon steel.

FEATURES



EET38640500
RIGHT HAND VERSION
SHOWN WITH GEAR GUARD

DIMENSIONS

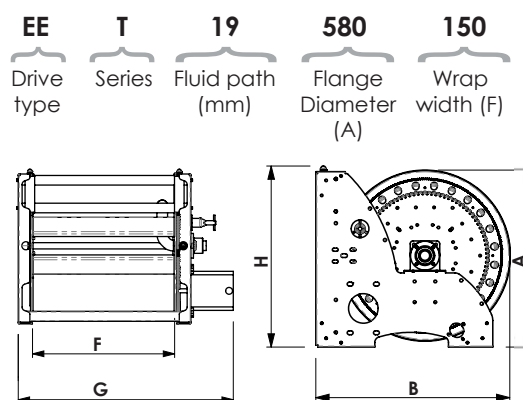

Detailed dimensional drawings available on request.
Quote drawing number ST10362-B.0

19mm ID HOSE CAPACITY

STANDARD FEATURES

Pin lock
Top rollers
800psi swivel

OPTIONAL EXTRAS

Bottom rollers
Friction brake
5000psi swivel
10000psi swivel
Gear guard
Reduction drive
Electric clutch
Auxiliary bevel crank
Level layer rewind*
Choice of finish

T SERIES 240VAC EXP MOTOR DRIVEN

Catalogue code	Hose length	Overall width (G)**	Frame height (H)	Overall depth (B)
EET19580150	20	453	675	660
EET19580200	30	503	675	660
EET19580300	45	603	675	660
EET19580400	50	703	675	660
EET19580450	60	753	675	660
EET19580500	70	803	675	660
EET19580550	80	853	675	660
EET19580600	90	903	675	660
EET19580650	95	953	675	660
EET19640500	100	803	690	700
EET19640550	110	853	690	700
EET19640600	125	903	690	700

* Wrap diameter for the above models = 280mm OD

*Level layer rewind system not available on all models.

**Overall width varies depending on your chosen motor type. Please consult the factory for more information.

25mm ID HOSE CAPACITY

T SERIES 240VAC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)**	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	EET25580150	10	453	675	660
	Top rollers	EET25580200	18	503	675	660
	800psi swivel	EET25580300	25	603	675	660
OPTIONAL EXTRAS	Bottom rollers	EET25580400	30	703	675	660
	Friction brake	EET25580450	35	753	675	660
	1500psi swivel	EET25580500	40	803	675	660
	4000psi swivel	EET25580550	45	853	675	660
	Gear guard	EET25580600	55	903	675	660
	Reduction drive	EET25580650	60	953	675	660
	Electric clutch	EET25640500	65	803	690	700
	Auxiliary bevel crank	EET25640550	70	853	690	700
	Level layer rewind*	EET25640600	80	903	690	700
	Choice of finish					

* Wrap diameter for the above models = 280mm OD

32-38mm ID HOSE CAPACITY

T SERIES 240VAC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)**	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	EET38640300	15	603	690	700
	Top rollers	EET38640400	20	703	690	700
	800psi swivel	EET38640500	30	803	690	700
OPTIONAL EXTRAS	Bottom rollers	EET38640600	35	903	690	700
	Friction brake	EET38640700	40	1003	690	700
	1500psi swivel	EET38780300	25	603	830	800
	4000psi swivel	EET38780400	35	703	830	800
	Gear guard	EET38780500	45	803	830	800
	Reduction drive	EET38780600	60	903	830	800
	Electric clutch					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

50mm ID HOSE CAPACITY

T SERIES 240VAC EXP MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)**	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	EET50640300	5	603	690	700
	Top rollers	EET50640400	8	703	690	700
	800psi swivel	EET50640500	10	803	690	700
OPTIONAL EXTRAS	Bottom rollers	EET50640600	12	903	690	700
	Friction brake	EET50640700	15	1003	690	700
	1500psi swivel	EET50780300	10	603	830	800
	3000psi swivel	EET50780400	20	703	830	800
	Gear guard	EET50780500	25	803	830	800
	Reduction drive	EET50780600	30	903	830	800
	Electric clutch					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

*Level layer rewind system not available on all models.

**Overall width varies depending on your chosen motor type. Please consult the factory for more information.

T SERIES PNEUMATIC MOTOR DRIVEN REELS

APPLICATION

The pneumatic motor driven T Series reel is suitable for a wide range of applications where a pneumatic motor driven reeling system is required. 4AM motors are supplied on the 19mm & 25mm ID hose capacity models, and 6AM motors on the 32-38mm & 50mm ID models.

HOSE TYPE

Supplied with or without hose

MEDIA

As per your hose type

CONSTRUCTION MATERIALS

Carbon Steel (standard)
304 Stainless Steel
316 Stainless Steel
Aluminium

FINISH

Powder Coated
Hot Dip Galvanized


Standard construction material is carbon steel.

FEATURES



AT38640500
RIGHT HAND VERSION
SHOWN WITH GEAR GUARD

DIMENSIONS

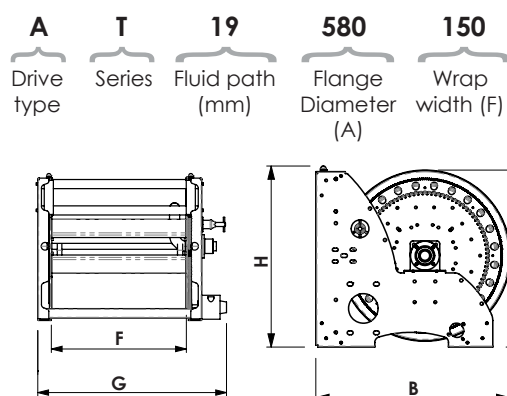

Detailed dimensional drawings available on request.
Quote drawing number ST10363-B.0

19mm ID HOSE CAPACITY

T SERIES 4AM PNEUMATIC MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	AT19580150	20	385	675	660
	Top rollers	AT19580200	30	435	675	660
	800psi swivel	AT19580300	45	535	675	660
OPTIONAL EXTRAS	Bottom rollers	AT19580400	50	635	675	660
	Friction brake	AT19580450	60	685	675	660
	5000psi swivel	AT19580500	70	735	675	660
	10000psi swivel	AT19580550	80	785	675	660
	Gear guard	AT19580600	90	835	675	660
	Reduction drive	AT19580650	95	885	675	660
	Electric clutch	AT19640500	100	735	690	700
	Auxiliary bevel crank	AT19640550	110	785	690	700
	Level layer rewind*	AT19640600	125	835	690	700
	Choice of finish					

* Wrap diameter for the above models = 280mm OD

*Level layer rewind system not available on all models. Please consult the factory.

25mm ID HOSE CAPACITY

T SERIES 4AM PNEUMATIC MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	AT25580150	10	385	675	660
	Top rollers	AT25580200	18	435	675	660
	800psi swivel	AT25580300	25	535	675	660
OPTIONAL EXTRAS	Bottom rollers	AT25580400	30	635	675	660
	Friction brake	AT25580450	35	685	675	660
	1500psi swivel	AT25580500	40	735	675	660
	4000psi swivel	AT25580550	45	785	675	660
	Gear guard	AT25580600	55	835	675	660
	Reduction drive	AT25580650	60	885	675	660
	Auxiliary bevel crank	AT25640500	65	735	690	700
	Level layer rewind*	AT25640550	70	785	690	700
	Choice of finish	AT25640600	80	835	690	700

* Wrap diameter for the above models = 280mm OD

32-38mm ID HOSE CAPACITY

T SERIES 6AM PNEUMATIC MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	AT38640300	15	592	690	700
	Top rollers	AT38640400	20	692	690	700
	800psi swivel	AT38640500	30	792	690	700
OPTIONAL EXTRAS	Bottom rollers	AT38640600	35	892	690	700
	Friction brake	AT38640700	40	992	690	700
	1500psi swivel	AT38780300	25	592	830	800
	4000psi swivel	AT38780400	35	692	830	800
	Gear guard	AT38780500	45	792	830	800
	Reduction drive	AT38780600	60	892	830	800
	Auxiliary bevel crank					
	Level layer rewind*					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

50mm ID HOSE CAPACITY

T SERIES 6AM PNEUMATIC MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	AT50640300	5	592	690	700
	Top rollers	AT50640400	8	692	690	700
	800psi swivel	AT50640500	10	792	690	700
OPTIONAL EXTRAS	Bottom rollers	AT50640600	12	892	690	700
	Friction brake	AT50640700	15	992	690	700
	1500psi swivel	AT50780300	10	592	830	800
	3000psi swivel	AT50780400	20	692	830	800
	Gear guard	AT50780500	25	792	830	800
	Reduction drive	AT50780600	30	892	830	800
	Auxiliary bevel crank					
	Level layer rewind*					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

*Level layer rewind system not available on all models. Please consult the factory.

T SERIES HYDRAULIC MOTOR DRIVEN REELS

APPLICATION

The hydraulic motor driven T Series reel is suitable for a wide range of applications where a hydraulic motor driven reeling system is required.

HOSE TYPE

Supplied with or without hose

MEDIA

As per your hose type

CONSTRUCTION MATERIALS

Carbon Steel
(standard)
304 Stainless Steel
316 Stainless Steel
Aluminium

FINISH

Powder Coated
Hot Dip Galvanized

Standard construction material is carbon steel.


FEATURES



HT38640500
RIGHT HAND VERSION
SHOWN WITH GEAR GUARD

DIMENSIONS

H Drive type
T Series
19 Fluid path (mm)
580 Flange Diameter (A)
150 Wrap width (F)

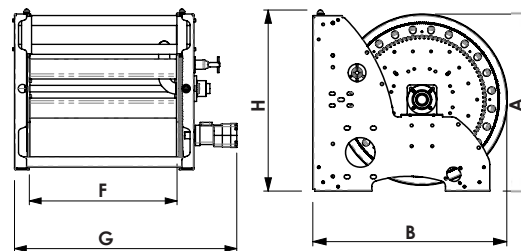

Detailed dimensional drawings available on request.
Quote drawing number ST10369-B.0

19mm ID HOSE CAPACITY

STANDARD FEATURES

Pin lock
Top rollers
800psi swivel

OPTIONAL EXTRAS

Bottom rollers
Friction brake
5000psi swivel
10000psi swivel
Gear guard
Reduction drive
Auxiliary bevel crank
Level layer rewind*
Choice of finish

T SERIES HYDRAULIC MOTOR DRIVEN

Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
HT19580150	20	455	675	660
HT19580200	30	505	675	660
HT19580300	45	605	675	660
HT19580400	50	705	675	660
HT19580450	60	755	675	660
HT19580500	70	805	675	660
HT19580550	80	855	675	660
HT19580600	90	905	675	660
HT19580650	95	955	675	660
HT19640500	100	805	690	700
HT19640550	110	855	690	700
HT19640600	125	905	690	700

* Wrap diameter for the above models = 280mm OD

*Level layer rewind system not available on all models. Please consult the factory.

25mm ID HOSE CAPACITY

T SERIES HYDRAULIC MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	HT25580150	10	455	675	660
	Top rollers	HT25580200	18	505	675	660
	800psi swivel	HT25580300	25	605	675	660
OPTIONAL EXTRAS	Bottom rollers	HT25580400	30	705	675	660
	Friction brake	HT25580450	35	755	675	660
	1500psi swivel	HT25580500	40	805	675	660
	4000psi swivel	HT25580550	45	855	675	660
	Gear guard	HT25580600	55	905	675	660
	Reduction drive	HT25580650	60	955	675	660
	Auxiliary bevel crank	HT25640500	65	805	690	700
	Level layer rewind*	HT25640550	70	855	690	700
	Choice of finish	HT25640600	80	905	690	700

* Wrap diameter for the above models = 280mm OD

32-38mm ID HOSE CAPACITY

T SERIES HYDRAULIC MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	HT38640300	15	605	690	700
	Top rollers	HT38640400	20	705	690	700
	800psi swivel	HT38640500	30	805	690	700
OPTIONAL EXTRAS	Bottom rollers	HT38640600	35	905	690	700
	Friction brake	HT38640700	40	1005	690	700
	1500psi swivel	HT38780300	25	605	830	800
	4000psi swivel	HT38780400	35	705	830	800
	Gear guard	HT38780500	45	805	830	800
	Reduction drive	HT38780600	60	905	830	800
	Level layer rewind*					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

50mm ID HOSE CAPACITY

T SERIES HYDRAULIC MOTOR DRIVEN

		Catalogue code	Hose length	Overall width (G)	Frame height (H)	Overall depth(B)
STANDARD FEATURES	Pin lock	HT50640300	5	605	690	700
	Top rollers	HT50640400	8	705	690	700
	800psi swivel	HT50640500	10	805	690	700
OPTIONAL EXTRAS	Bottom rollers	HT50640600	12	905	690	700
	Friction brake	HT50640700	15	1005	690	700
	1500psi swivel	HT50780300	10	605	830	800
	3000psi swivel	HT50780400	20	705	830	800
	Gear guard	HT50780500	25	805	830	800
	Reduction drive	HT50780600	30	905	830	800
	Level layer rewind*					
	Choice of finish					

* Wrap diameter for the above models = 410mm OD

*Level layer rewind system not available on all models. Please consult the factory.



RECOILA AUSTRALIA - HEAD OFFICE
Unit 1/10 Melissa Place
Kings Park NSW 2148
Australia

Phone +61 2 9621 8988
Fax +61 2 9621 7688
sales@recoila.com.au

RECOILA NEW ZEALAND
18 Mani Street, Pukete
Hamilton 3200
New Zealand

Phone +64 7 847 4111
Fax +64 7 847 4112
sales@recoila.co.nz

www.recoila.com.au

www.recoila.co.nz

VISIT
RECOILA
ONLINE

