


POK WATERWALL



Our range of waterwall nozzle is used for fire protection of tanks and equipment sensitive to heat or sparks.

The diffusion plate of the aluminium waterwall nozzles is equipped with grooves allowing a better conservation of the stream pattern during difficult climate conditions (wind).

It is equipped with a handle and a stabilizing device.

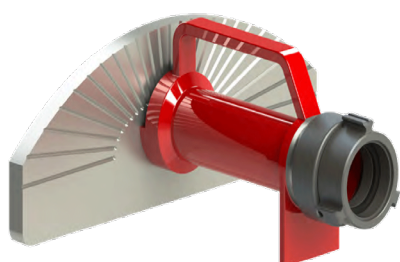

Maximum working pressure: PN16
Material: aluminium alloy
Surface treatment : polyester coated
Handle: one
Body type: molded

Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN40	300 lpm	6 bar	259 x 320 x 130	1.4	16096. ROUGE
DSP DN40	500 lpm	6 bar	259 x 320 x 130	1.4	03528
DSP DN40, with lock	400 lpm	6 bar	287 x 320 x 130	1.6	37758
DSP DN50	500 lpm	6 bar	259 x 320 x 130	1.5	16527
1.5" female NST-NH	500 lpm	6 bar	242 x 320 x 130	1.5	02238
DSP DN65	500 lpm	6 bar	257 x 320 x 130	1.6	03527
2" male BSP	500 lpm	6 bar	206 x 320 x 130	1.2	09016
Storz C/52	500 lpm	6 bar	241 x 320 x 130	1.5	09017
2.5" female NST-NH	1200 lpm	6 bar	336 x 399 x 160	3.4	02239
2.5" male BSP	1200 lpm	6 bar	289 x 399 x 160	3	09018
Storz B/75	1200 lpm	6 bar	327 x 399 x 160	3.4	09019
DSP DN65	1200 lpm	6 bar	330 x 399 x 160	3.2	09380
2.5" male BSP	1400 lpm	7 bar	289 x 399 x 160	3	33863
2.5" male Instantaneous	1800 lpm	8 bar	339 x 399 x 160	3.2	37012

AVAILABLE FROM



National Sales Office & Warehouse
 Unit 1 / 23 Christable Way
 LANDSDALE Western Australia 6055
 1300 922 303
 + 61 8 6201 3170
interfire.com.au
info@interfire.com.au

South Australian Office & Warehouse
 Unit 9 / 28 Heath St
 LONSDALE South Australia, 51605
 1300 922 303
 + 61 8 6201 3170
interfire.com.au
info@interfire.com.au