


DATASHEET

TUNER PRO

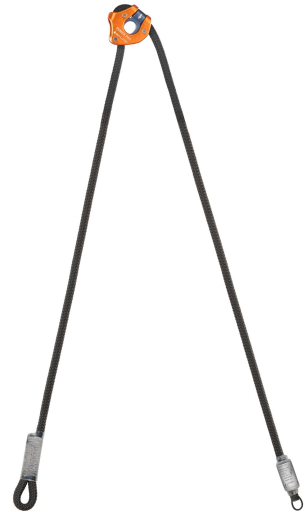

GENERAL

Art.Nr:	L-1017-5
GTIN:	8053841303375
E-class number:	40-21-08-13
Customs tariff number:	56090000

Standards:	EN 358:2018, EN 795:2012/B
Net weight:	0.42 kg
Gross weight:	0.50 kg

www.skylotec.com | Datenblatt, 26.03.25

AVAILABLE FROM



National Sales Office & Warehouse
Unit 1 / 23 Christable Way
LANDSDALE Western Australia 6055
1300 922 303
+ 61 8 6201 3170
interfire.com.au
info@interfire.com.au

South Australian Office &
Warehouse Unit 9 / 28 Heath St
LONSDALE South Australia, 5160
1300 922 303
+ 61 8 6201 3170
interfire.com.au
info@interfire.com.au

DATASHEET

TUNER PRO

Adjustable single lanyard for rope access, work at height and rescue. It can be used as an EN 358 positioning and restraint lanyard or for creating EN 795-B and CEN TS 16415 anchors for two operators.

Main features:

- it offers the highest workloads on the market despite its compact size and low weight;
- the adjuster stands out for its mobile system (Patent Pending) that guarantees immediate and safe locking of the rope regardless of the shape of the Used EN 362 connector;
- the special geometry of the adjuster allows the length of the lanyard to be managed smoothly and precisely;
- the lanyard is released intuitively, with just one hand even with a light load, by holding the adjuster and pressing the release button;
- equipped with a 9.6 mm EN 1891-A rope, light, flexible and designed for the most intense uses;
- the adjuster can be connected to the anchor or directly to the harness depending on the needs;
- by installing the adjuster on the harness, it will be closer to the user and can be easily adjusted even if the anchor is out of reach of the hands;
- equipped with a terminal elastic loop that allows the free end of the rope to be positioned during use;
- it can be combined with rope protection devices;
- available in different lengths starting from 1.3 m.

FEATURES

Colour:	Black, Orange
Maximum lifetime:	12 years
Minimum temperature:	-30 °C
Maximum temperature:	50 °C
Patent status:	Patent pending
Individually tested:	No
100% quality control:	Yes

DIMENSIONS

length_lanyard:	5.00 m
Lanyard rope diameter:	9.60 mm

MATERIAL

Material:	Aluminium, Polyamide
-----------	----------------------

www.skylotec.com | Datenblatt, 26.03.25

AVAILABLE FROM



National Sales Office & Warehouse
Unit 1 / 23 Christable Way
LANDSDALE Western Australia 6055
1300 922 303
+ 61 8 6201 3170
interfire.com.au
info@interfire.com.au

South Australian Office &
Warehouse Unit 9 / 28 Heath St
LONSDALE South Australia, 5160
1300 922 303
+ 61 8 6201 3170
interfire.com.au
info@interfire.com.au